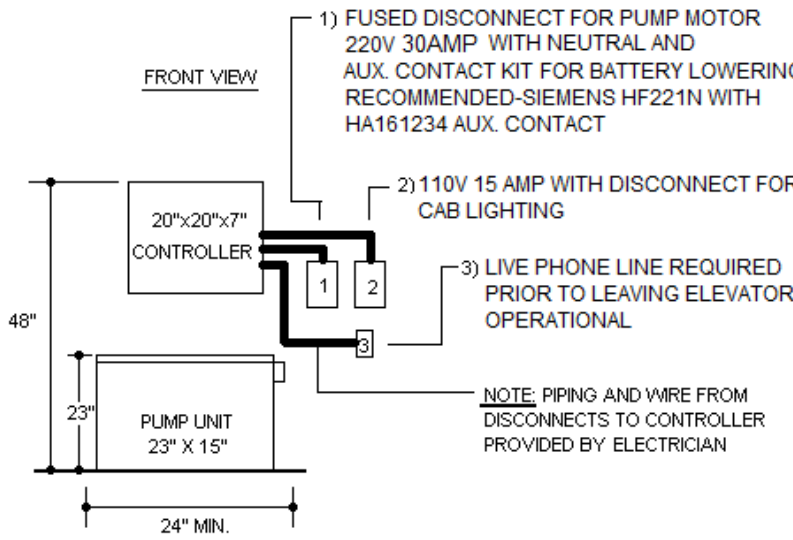

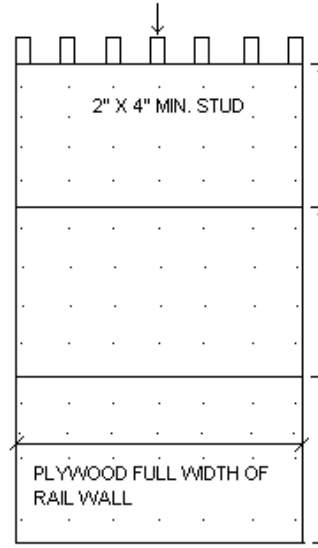


ELEVATOR EQUIPMENT	PROVISIONS BY OTHERS	BRACKET DETAIL
<p style="text-align: center;"><u>FRONT VIEW</u></p>  <p>1) FUSED DISCONNECT FOR PUMP MOTOR 220V 30AMP WITH NEUTRAL AND AUX. CONTACT KIT FOR BATTERY LOWERING RECOMMENDED-SIEMENS HF221N WITH HA161234 AUX. CONTACT</p> <p>2) 110V 15 AMP WITH DISCONNECT FOR CAB LIGHTING</p> <p>3) LIVE PHONE LINE REQUIRED PRIOR TO LEAVING ELEVATOR OPERATIONAL</p> <p>NOTE: PIPING AND WIRE FROM DISCONNECTS TO CONTROLLER PROVIDED BY ELECTRICIAN</p> <p>20"x20"x7" CONTROLLER</p> <p>48"</p> <p>23"</p> <p>PUMP UNIT 23" X 15"</p> <p>24" MIN.</p>	<ol style="list-style-type: none"> 1) EQUIPMENT ROOM AND PLUMB HOISTWAY TO LOCAL CODES 2) SLEEVES/CONDUITS FOR HYDRAULIC HOSES AND ELECTRICAL FROM EQUIPMENT TO HOISTWAY 3) REMOVABLE BARRICADES ON HOISTWAY OPENINGS 4) ALL DIMENSION TOLERANCES TO BE WITHIN 1/4" 5) 220V AND 110V CIRCUITS WITH NEATRAL AND DISCONNECTS SUPPLIED TO CONTROLLER 6) TELEPHONE LINE 7) STRUCTURAL NOTE: DRAWINGS SIGNED AND SEALED FOR WALL ANCHORAGE, ACHORAGE DESIGNED FOR MANUFACTURERS GIVEN LOADS 	<p>TYPICAL FASTENING:</p> <p>WOOD STUD: 5EA. 1/2" X 3.25" LAGS</p> <p>SOLID BLOCK: 3EA. WEDGE ANCHORS 1/2" X 3.75"</p>  <p>6" 6" 6" 6"</p> <p>VERTICAL BRACKET SPACING 7' MAXIMUM</p>
	ELEVATOR SPECIFICATIONS	<p style="text-align: center;"><u>RAIL WALL DETAIL</u></p> <p>START AT RAIL WALL CENTER LINE WITH FIRST STUD AND WORK OUT FROM THERE 6" ON CENTER, BOTH DIRECTIONS. STUDS TO BE IN-LINE BOTTOM TO TOP OF RAIL WALL, USE PLUMB BOB OR LASER FOR ALIGNMENT</p>  <p>3/4" PLYWOOD DIRECTLY ON STUDS FROM BOTTOM TO TOP OF RAIL WALL ONLY, NAILED OR SCREWED EVERY 6" TO 8"</p> <p>2" X 4" MIN. STUD</p> <p>4' ←</p> <p>4' ←</p> <p>4' ←</p> <p>PLYWOOD FULL WIDTH OF RAIL WALL</p>
	<p>COMPLIES WITH ASME A 17.1 TYPE: HYDRAULIC CAPACITY: 950LBS SPEED: 40FPM CONTROLLER: PLC DOOR LOCK:EMI RAILS: 10' X 8LB RAIL BRACKET: FORMED STEEL SUSPENION: 3/8" AIRCRAFT CABLE SUSPENION RATING: 14,400LBS EA. SUSPENION END: SHACKLE/ BUTTON CAR SLING: FORMED STEEL PLATFORM: 1 1/2" CAB WALLS: 3/4" CAB ROOF: 3/4" CAR STATION: 14 GA PHONE: JACK/ BOX HANDRAIL: 32" GATE: SCISSOR/ FOLDING GATE SWITCH: GAL TYPE PLUNGER: 2 3/4" CYLINDER: 4" POWER UNIT: SUBMERSIBLE OVERLOAD: THERMAL MOTOR: 4 HP PUMP: 35L SHEAVE: 10"/ FORMED STEEL GUIDE SHOES: ALUMINUM</p>	<p>APPROVED:</p> <p>APPROVED AS NOTED:</p> <p>BY:</p> <p>JOB NAME:</p> <p>ADDRESS:</p> <p>SOUTHEAST ELEVATOR, INC. 772-461-0030</p> <p style="text-align: right;">PAGE 2</p>